

Portable Storage Bins

Concept - Design - Manufacture




- All galvanised construction - using 5mm and 3mm thick steel.
- Capacities up to 25 tonnes (based on wheat at 750kg/m³).
- Easy to assemble - supplied flat pack for bolted construction on site.
- Specifically designed for dump loading by telehandler buckets.
- Bump bars on dump loaded bins to minimise damage from forklifts.
- Fitted with a manually operated bin slide for maximum control of flow rate.
- Optional forklift channels to ensure complete portability.
- Mobile drier compatible.



www.perryfoakley.co.uk
sales@perryfoakley.co.uk
+44 (0)1404 890300

Contact us today to
speak to one of our
experienced engineers!

The UK's most experienced manufacturer of materials handling & drying equipment

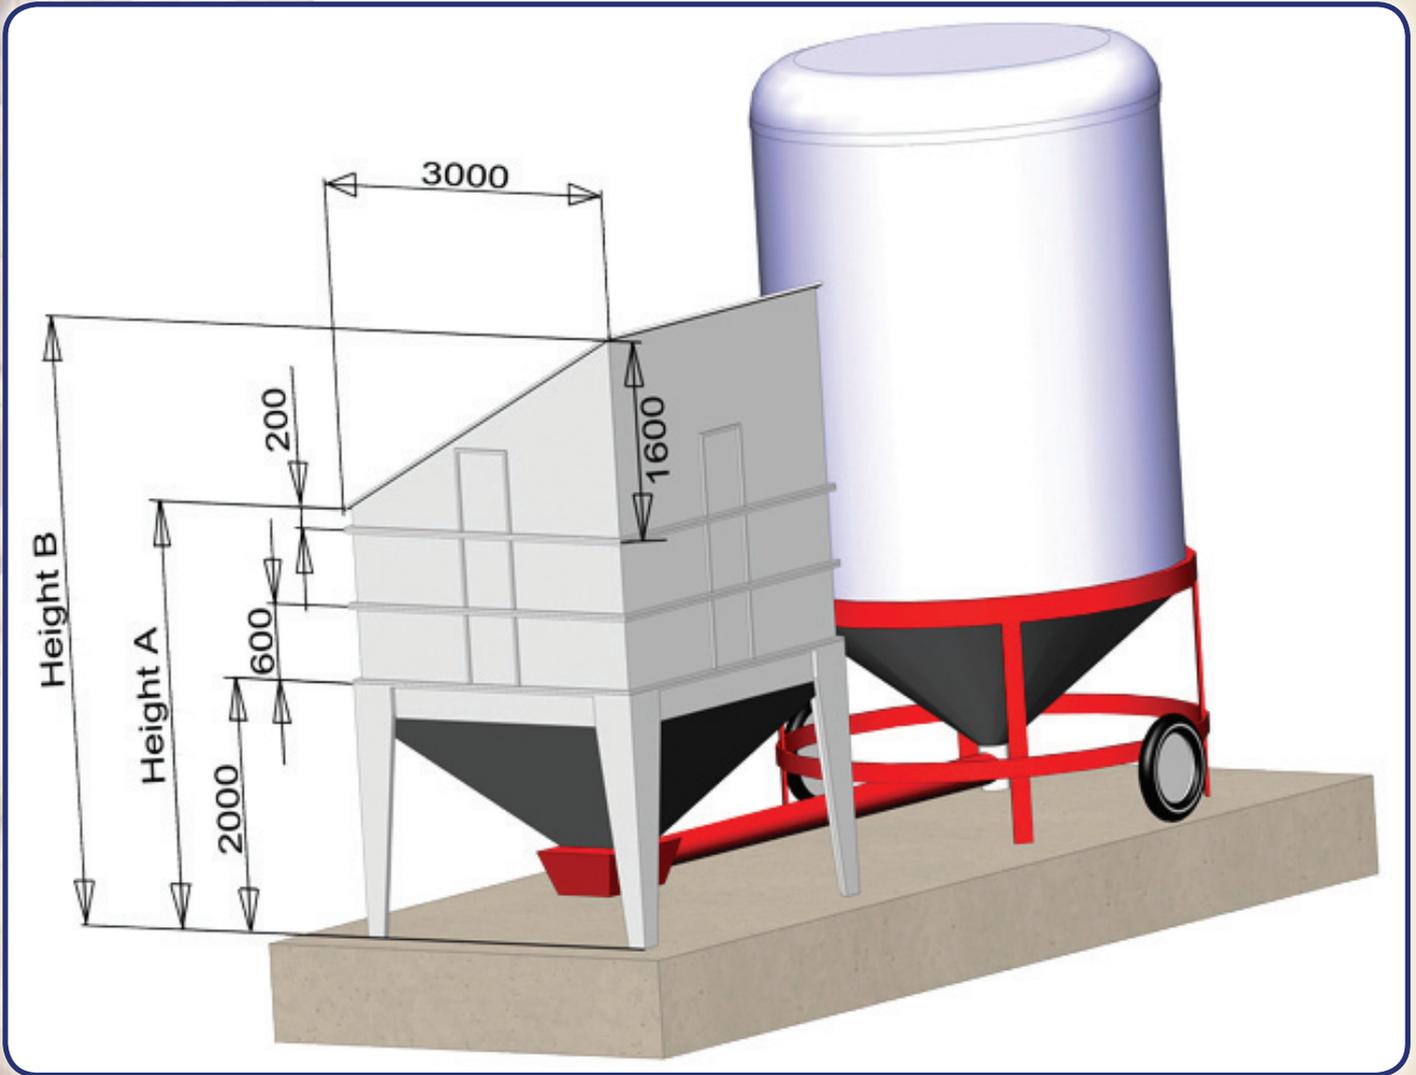

Capacity	Height A	Height B	Width	Vol Level Fill (Excl. Splashback)
12 Tonnes	3,400mm	4,800mm	3,000mm	14.1 Cubic M
15 Tonnes	4,000mm	5,400mm	3,000mm	19.2 Cubic M
20 Tonnes	4,600mm	6,000mm	3,000mm	24.2 Cubic M
25 Tonnes	5,200mm	6,600mm	3,000mm	29.3 Cubic M

Capacity based on wheat at 750kg/m³.



www.perryfoakley.co.uk
sales@perryfoakley.co.uk
 +44 (0)1404 890300

Contact us today to speak to one of our experienced engineers!

The UK's most experienced manufacturer of materials handling & drying equipment